



## SUNNY BOY 3000TL / 4000TL / 5000TL

SB 3000TL-20 / SB 4000TL-20 / SB 5000TL-20



### High Yields

- Maximum efficiency of 97 %
- Multi-String technology\*
- Transformerless, with H5 topology
- Shade management with OptiTrac Global Peak

### Safe

- Integrated ESS DC switch-disconnector

### Simple

- Easily accessible connection area
- Cable connection without tools
- DC plug system SUNCLIX

### Communicative

- Bluetooth technology as standard
- Multilingual graphic display
- Multi-function relay as standard


## SUNNY BOY 3000TL / 4000TL / 5000TL

Perfection Plus. Usability. The transformerless Sunny Boy generation

More communicative, easier to use and more efficient than ever: this Sunny Boy is setting new standards in inverter technology. A modern graphic display, readout of daily values even after sunset, simplified installation concept and wireless communication via *Bluetooth*: The new Sunny Boys fulfill every wish. With the new OptiTrac Global Peak shade management and an optimal efficiency of 97 %, the inverters ensure optimum solar yield. As transformerless, multi-string devices, the Sunny Boy 4000TL and 5000TL provide maximum flexibility for plant design, and are the first choice for demanding generator designs.

\*Sunny Boy 4000TL / 5000TL

Technical data	Sunny Boy 3000TL	Sunny Boy 4000TL	Sunny Boy 4000TL/V	Sunny Boy 5000TL
<b>Input (DC)</b>				
Max. DC power (@ $\cos \varphi = 1$ )	3200 W	4200 W	4200 W	5300 W
Max. DC voltage	550 V	550 V	550 V	550 V
MPP voltage range	188 V - 440 V	175 V - 440 V	175 V - 440 V	175 V - 440 V
DC nominal voltage	400 V	400 V	400 V	400 V
Min. DC voltage / start voltage	125 V / 150 V	125 V / 150 V	125 V / 150 V	125 V / 150 V
Max. input current / per string	17 A / 17 A	2 x 15 A / 15 A	2 x 15 A / 15 A	2 x 15 A / 15 A
Number of MPP trackers / strings per MPP tracker	1 / 2	2 / A: 2, B: 2	2 / A: 2, B: 2	2 / A: 2, B: 2
<b>Output (AC)</b>				
AC nominal power (@ 230 V, 50 Hz)	3000 W	4000 W	3680 W	4600 W
Max. AC apparent power	3000 VA	4000 VA	4000 VA	5000 VA
Nominal AC voltage; range	220, 230, 240 V; 180 - 280 V	220, 230, 240 V; 180 - 280 V	220, 230, 240 V; 180 - 280 V	220, 230, 240 V; 180 - 280 V
AC grid frequency; range	50, 60 Hz; $\pm 5$ Hz	50, 60 Hz; $\pm 5$ Hz	50, 60 Hz; $\pm 5$ Hz	50, 60 Hz; $\pm 5$ Hz
Max. output current	16 A	22 A	22 A	22 A
Power factor ( $\cos \varphi$ )	1	1	1	1
Phase conductors / connection phases	1 / 1	1 / 1	1 / 1	1 / 1
<b>Efficiency</b>				
Max. efficiency / Euro-eta	97.0 % / 96.3 %	97.0 % / 96.4 %	97.0 % / 96.4 %	97.0 % / 96.5 %
<b>Protection devices</b>				
DC reverse-polarity protection	●	●	●	●
ESS switch-disconnector	●	●	●	●
AC short circuit protection	●	●	●	●
Ground fault monitoring	●	●	●	●
Grid monitoring (SMA Grid Guard)	●	●	●	●
Galvanically isolated / all-pole sensitive fault current monitoring unit	-/●	-/●	-/●	-/●
Protection class / overvoltage category	I / III	I / III	I / III	I / III
<b>General data</b>				
Dimensions (W / H / D) in mm	470 / 445 / 180	470 / 445 / 180	470 / 445 / 180	470 / 445 / 180
Weight	22 kg	25 kg	25 kg	25 kg
Operating temperature range	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C
Noise emission (typical)	$\leq 25$ dB(A)	$\leq 29$ dB(A)	$\leq 29$ dB(A)	$\leq 29$ dB(A)
Internal consumption: (night)	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W
Topology	transformerless	transformerless	transformerless	transformerless
Cooling concept	Convection	OptiCool	OptiCool	OptiCool
Electronics protection rating / connection area (as per IEC 60529)	IP65 / IP54	IP65 / IP54	IP65 / IP54	IP65 / IP54
Climatic category (per IEC 60721-3-4)	4K4H	4K4H	4K4H	4K4H
<b>Features</b>				
DC connection: SUNCLIX	●	●	●	●
AC connection: screw terminal / plug connector / spring-type terminal	-/●/●	-/●/●	-/●/●	-/●/●
Display: text line / graphic	-/●	-/●	-/●	-/●
Interfaces: RS485 / Bluetooth	○/●	○/●	○/●	○/●
Warranty: 5 / 10 / 15 / 20 / 25 years	●/○/○/○/○	●/○/○/○/○	●/○/○/○/○	●/○/○/○/○
Certificates and permits (more available on request)	CE, VDE 0126-1-1, DK 5940, RD 1663, G83/1-1, PPC, AS4777, EN 50438*, C10/C11, PPDS			
* Does not apply to all national deviations of EN 50438				
● Standard features ○ Optional features - not available				
Data at nominal conditions				
Type designation	SB 3000TL-20	SB 4000TL-20	SB 4000TL-20/V 0159	SB 5000TL-20

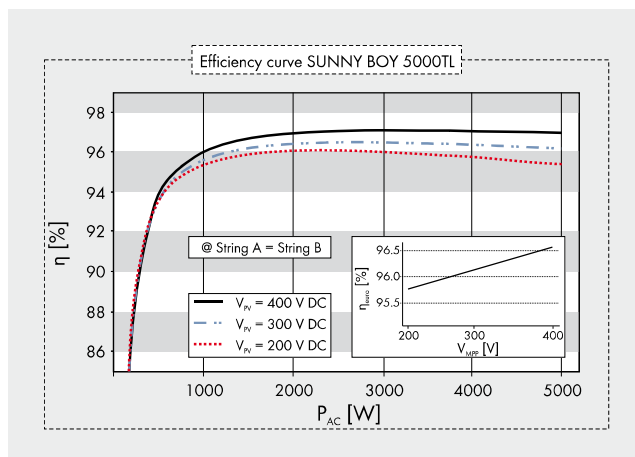

## Accessories



RS485 interface  
DM-485CB-10