




REC PRODUCT BROCHURE



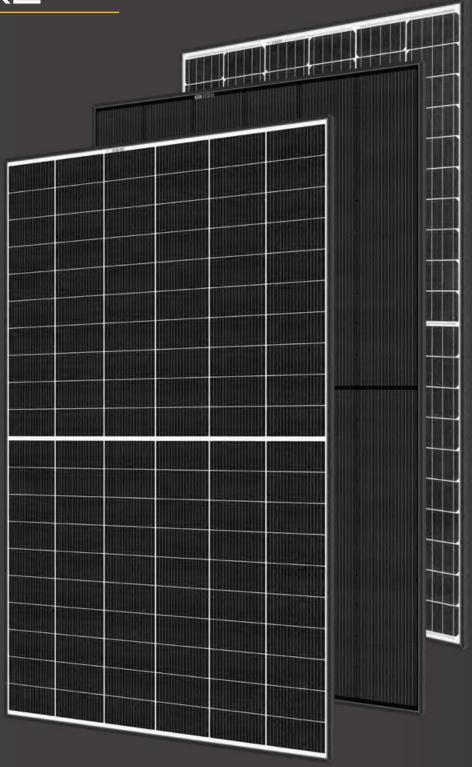

REC - SOLAR'S MOST TRUSTED

REC - A TRUSTED PARTNER

REC is an international, pioneering, solar energy company with Scandinavian heritage and a strong reputation across the world. Dedicated to bringing clean solar energy to everyone with our reliable and high-end products, 'Solar's Most Trusted' is not just a slogan – it is a promise we live up to every day in delivering outstanding, high quality products to our customers.



REC - EMPOWERING CONSUMERS

REC solar panels are already powering all parts of our lives - homes, schools, sport stadiums, hospitals, supermarkets and airports to name but a few. We believe solar is the present and future.





REC - A DRIVEN FACILITATOR

REC makes it possible to power your own home or business independently and efficiently. With its iconic and cutting-edge products, REC helps you generate more energy and make significant savings on electricity bills.


REC - A FRONT-RUNNING INNOVATOR

Innovation is in REC's DNA: constantly leading the way in high efficiency and powerful products. REC was the first company to introduce half-cut cell technology into multicrystalline panel production and the first to apply its iconicTwin design for extra power and efficiency.



REC QUALITY

Supplying customers with the very best products is key to everything we do at REC. For us, this means high levels of quality at every stage of production, shipping and sales, right through to the final installation.

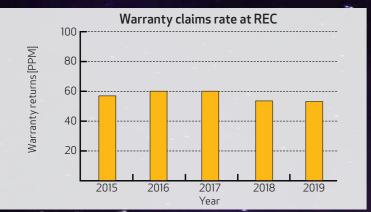


LOW PRODUCT CLAIMS RATE

REC panels consistently demonstrate a low number of product defects according to published statistics. Calculated as parts per million panels produced, REC's claims rate is one of the lowest in solar.

OUTPERFORMING COMPETITORS

REC panels have been tested by third parties against competitors to directly compare performance. Testing shows REC outperforms competitive products in all climatic conditions, confirming our dedication to quality.



Source: Comparative Outdoor Module Test, SERIS, Singapore, 2019



INTERNAL QUALIFICATION TO 3 X IEC

Before even hitting the production lines, REC products are tested to at least 3 times the international quality standards for solar panels. This is central to our development program and ensures that all REC panels are robust enough for any climate.

AWARDS & RECOGNITION



-2019 TOP PERFORMER

∷-PVEL















WINNER



REC WARRANTY

REC's ProTrust Warranty package covers product, performance, and labor – and is exclusively offered by REC Certified Solar Professional installers. This means unprecedented savings, more economic security, and greater energy autonomy for consumers.



PRODUCT

PERFORMANCE

LABOR

Covers any panel defects and promises superior quality for at least 20 years. All panels are eligible for a +5 year product warranty **extension**, as part of the REC ProTrust Warranty.

Ensures that REC panels perform exactly as expected to – every year for 25 years. Higher warranted power and higher annual yields, enable greater ROI predictability.

Unique to the REC ProTrust Warranty, this gives added protection in the unlikely event that an REC panel needs to be

The table below provides an overview of REC's leading warranty by system size:

| REC warranty type | REC PROTRUST WARRANTY | | REC'S LEADING STANDARD WARRANTY |
|--|--|--------------------------------------|---|
| Installer group | Exclusive to REC Certified Solar Professional installers | | All installers |
| System size | <25 kW | 25-500 kW | All |
| Product Warranty | 25 years* | 25 years* | 20 years |
| Labor Warranty | 25 years* | 10 years* | 0 |
| | | | |
| Performance Warranty | Minimum power in year 1 | Year 2-25 maximum annual degradation | Guaranteed % of nameplate power in year 25 |
| Performance Warranty REC Alphα Series | - | annual degradation | |
| · | - | | Guaranteed % of nameplate power in year 25 92.0% |
| REC Alphα Series | in year 1 | annual degradation | |
| REC Alphα Series REC Alphα 72 Series | in year 1 | annual degradation 0.25% | 92.0% |

^{*} Installations must be registered via REC SunSnap app or REC Certified Solar Professional Portal



VENICE, ITALY

World's first REC Alpha Series installation.

6.3 kW

System size

2019

6.2 TONS


CO₂ emissions saved annually

REC ALPHX TECHNOLOGY

Leveraging the most cutting-edge cell architecture in combination with an advanced connection technology, the REC Alpha Series pushes power, efficiency, and reliability to a whole new level. Delivering high power density in a 60-cell format, the Alpha maximizes power, savings and greatly increases the customer's energy autonomy.

Heterojunction Cell Technology

A heterojunction cell combines all the advantages of crystalline and thin-film solar technologies in a single hybrid structure. This provides one of the most effective cell passivations on the market for high levels of power and efficiency - even in hot climates.

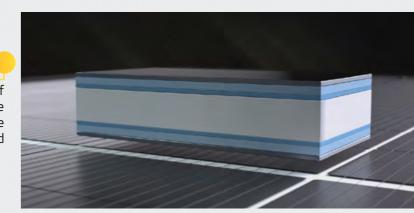

Advanced Connection Technology

REC's specially-developed, low temperature, solder and lead-free connection technology protects the cell from thermal stress during production for improved quality. With over 1600 contact points per cell, the Alpha dramatically improves current flow to produce even more power!

REC's Twin Design

REC's iconic Twin design delivers a significant power boost compared to conventional panels, as well as improving performance in shaded conditions.



Super Strong Frame

With its distinctive frame, including two support bars across the rear, the REC Alpha Series is able to withstand loads, e.g., snow, of up to 7000 Pa, making it stronger and more robust than competitive products. The innovative frame protects against deformation, increasing reliability and long-term high power



REC ALPHX SERIES

60 CELL



Over 20% more power on your roof

- Most advanced cell structure for high efficiency
- Maximized power for maximum savings
- High power density: get the most out of limited spaces

Advanced cell connection technology

- Low temperature production for longer-lasting quality
- Eliminates invasive soldering process
- Lead-free cells and connections

Leading temperature performance

- Leading temperature coefficient for more production in hot climates
- Keeps cells working efficiently, even at the hottest times

Protects from initial drop in installed power

- N-type cell technology protects against light induced degradation (LID)
- $\bullet\,$ You get the installed power you paid for with no drop-off

Super strong frame

- Improved durability for a lifetime of high power
- 30 mm height for lightweight and compact installation
- Ensures long-lasting high power

Exceptional quality

- Greatly reduced risk of defects through superior build quality
- State of the art, highly automated production

Environmentally-friendly

- Colossal 81% reduced lead content
- Advanced technology minimizes carbon footprint

| Dimensions: | 1721 x 1016 x 30 mm |
|--------------------------|----------------------|
| Weight: | 19.5 kg |
| Efficiency: | 21.7 % |
| Power Density: | 217 W/m ² |
| Max. System Voltage: | 1000 V |
| Temperature Coefficient: | -0.26 %/°C |





REC ALPHX 72 SERIES

72 CELL

450 WP POWER

Reduces overall installation costs

- Larger 72-cell format for faster installation
- Fewer rails and fewer clamps for reduced BOS cost, improving rate of return on larger systems

More power

- Most advanced cell structure for high efficiency
- Maximized power for maximum savings
- High power density: get the most out of limited spaces

Advanced cell connection technology

- Low temperature production for longer-lasting quality
- Eliminates invasive soldering process
- Lead-free cells and connections

Leading temperature performance

- Leading temperature coefficient for more production in hot climates
- Keeps cells working efficiently, even at the hottest times


Protects from initial drop in installed power

- N-type cell technology protects against light induced degradation (LID)
- You get the installed power you paid for with no drop-off

Guaranteed better durability

- Outstanding warranty guarantees 92% power after 25 years
- Super strong frame better protects against the elements
- Lasting high power thanks to exceptional quality

| Dimensions: | 2063 x 1026 x 30 mm |
|--------------------------|----------------------|
| Weight: | 23.5 kg |
| Efficiency: | 21.3 % |
| Power Density: | 213 W/m ² |
| Max. system voltage: | 1500 V |
| Temperature coefficient: | -0.26 %/°C |
| | |

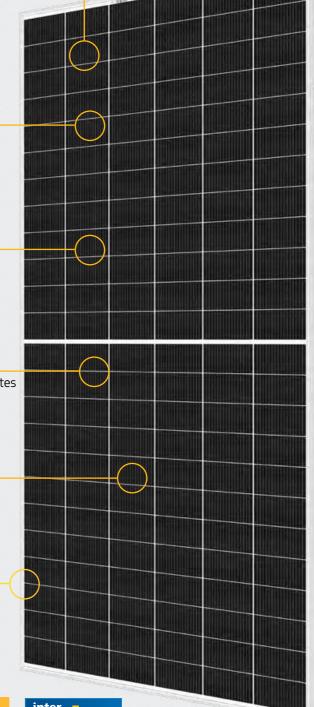

REC ALPHOX BLACK SERIES

60 CELL

Stylish looks

Full-black design with practically invisible cell connections for the most elegant feature on your roof



Over 20% more power on your roof

- Most advanced cell structure for high efficiency
- Maximized power for maximum savings
- High power density: get the most out of limited spaces

Advanced cell connection technology

- Low temperature production for longer-lasting quality
- Eliminates invasive soldering process
- Lead-free cells and connections

Leading temperature performance

- Leading temperature coefficient for more production in hot climates
- Keeps cells working efficiently, even at the hottest times

Protects from initial drop in installed power

- N-type cell technology protects against light induced degradation (LID)
- You get the installed power you paid for with no drop-off

Super strong frame

- Improved durability for a lifetime of high power
- 30 mm height for lightweight and compact installation
- Ensures long-lasting high power

Exceptional quality

- Greatly reduced risk of defects through superior build quality
- State of the art, highly automated production


Environmentally-friendly

- Colossal 81% reduced lead content
- Advanced technology minimizes carbon footprint

Dimensions: 1721 x 1016 x 30 mm Weight: 19.5 kg 21.4% Efficiency: Power Density: 214 W/m² 1000 V Max. System Voltage: Temperature Coefficient: -0.26 %/°C





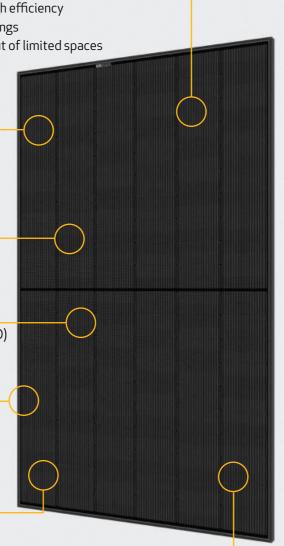



7.0 kW 2019


System

size

6.9 TONS

CO₂ emissions saved annually year installed



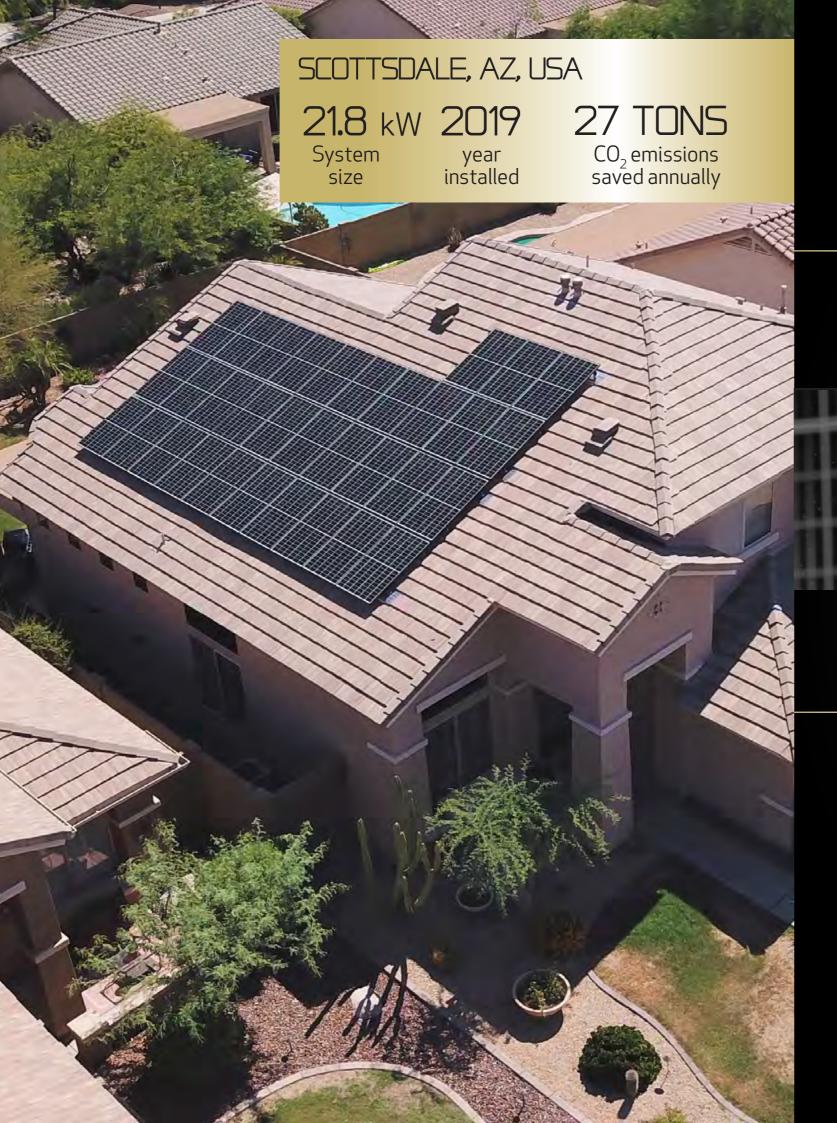


REC N-PEAK TECHNOLOGY

REC N-Peak Series solar panels feature high efficiency n-type cell technology for excellent performance. Achieving watt classes of up to 330 Wp, the REC N-Peak Series enables you to pack high power into a limited space and achieve higher capacity with fewer panels.

N-Type Monocrystalline Cells

The negatively charged treatment (doping) of the cells creates one of the most efficient crystalline cell technologies for high light absorption and efficiency.

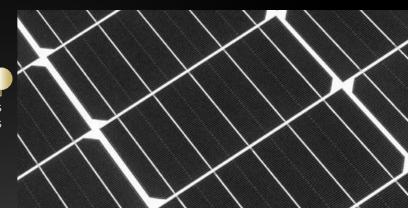


PERT Technology

Like a barrier layer across the rear of the cell, PERT helps keeps the cell at a cool operating temperature and improves overall efficiency for higher yields.

REC's Twin Design

REC's revolutionary Twin design delivers a significant power boost compared to conventional panels, as well as improving performance in shaded conditions.



Super Strong Frame

With its distinctive frame, including two support bars across the rear, the REC N-Peak offers more strength and robustness under load than standard products, protecting it from deformation and increasing long-term reliability.



REC N-PEAK SERIES

60 CELL

330 WP POWER

Highly efficient crystalline cell technology

- N-type monocrystalline cell base for high light absorption
- Half-cut cells produce more power
- Produced on REC's state of the art, automated production lines

Improved temperature performance

- Low temperature co-efficient for more energy generation when the sun is strongest
- PERT technology keeps the cell at a cool operating temperature

Protects from initial drop in installed power

- N-type cell technology protects against light induced degradation (LID)
- You get the installed power you paid for without drop-off

Increased energy yield when shaded

• REC's Twin design improves performance in shaded conditions

Lower internal resistances

- Decreases internal stress through reduced electron congestion
- Improved reliability efficiency and durability

Super strong frame

- Improved durability for a lifetime of high power
- 30 mm height for lightweight and compact installation

| Dimensions: | 1675 x 997 x 30 mm |
|--------------------------|----------------------|
| Weight: | 18 kg |
| Efficiency: | 19.8 % |
| Power Density: | 198 W/m ² |
| Max. System Voltage: | 1000 V |
| Temperature Coefficient: | -0.35 %/°C |



REC N-PEAK BLACK SERIES

60 CELL

Stylish looks

Full-black design for a seamless appearance on your roof

325 WP POWER

Highly efficient crystalline cell technology

- N-type monocrystalline cell base for high light absorption
- Half-cut cells produce more power
- Produced on REC's state of the art, automated production lines

Improved temperature performance

- Low temperature co-efficient for more energy generation when the sun is strongest
- PERT technology keeps the cell at a cool operating temperature

Protects from initial drop in installed power

- N-type cell technology protects against light induced degradation (LID)
- You get the installed power you paid for without drop-off

Increased energy yield when shaded

• REC's Twin design improves performance in shaded conditions

Lower internal resistances

- Decreases internal stress through reduced electron congestion
- Improved reliability efficiency and durability

Super strong frame

- Improved durability for a lifetime of high power
- 30 mm height for lightweight and compact installation

| Dimensions: 1675 | x 997 x 30 mm |
|--------------------------|----------------------|
| Weight: | 18 kg |
| Efficiency: | 19.5 % |
| Power Density: | 195 W/m ² |
| Max. System Voltage: | 1000 V |
| Temperature Coefficient: | -0.35 %/°C |



12 13

CHÂTEAUNEUF DU RHÔNE, FRANCE 36 kW 2010 27 TONS CO₂ emissions saved annually year installed System

REC TWIN TECHNOLOGY

REC's Twin Technology is an iconic advancement in crystalline solar panel technology that delivers a power boost of up to 20 Wp per panel compared to standard multicrystalline panels.

Half-Cut Cells

REC's Twin cells are rectangular in shape, contrasting with standard full-square cells. Cutting cells this way reduces internal resistance, so cells work more efficiently and provide even more power than ever!



PERC Technology

PERC is a special layer in the cell which helps keep it cooler and working more efficiently. It helps the cell absorb more light throughout the day, increasing production in low light conditions, e.g., under cloud and at dawn and dusk, for higher overall energy yield.

Split Junction Box

The innovative 3-part junction box used in REC's Twin design is key to the distinctive layout of our products. The smaller boxes keeping the cells around 15°C cooler than a single box. With less retained heat, the whole panel is more reliable and efficient.



0% Standard Panel 50% REC TwinPeak

Improved Performance When Shaded

Splitting the panel into two sections creates an advantage under certain types of shading e.g., between rows. Where a conventional panel fully stops generation even if only a small part is shaded, REC's Twin design ensures continued production, improving overall yield.

REC TWINPEAK 3 MONO SERIES*

60 CELL

340 WP POWER

Stylish looks

Full-black design for a seamless appearance on your roof

More power through reduced resistance

- Halfcut cells for more power
- Better electron flow for stable power

Improved performance in shaded conditions

- REC's iconic Twin design generates more energy
- When one half is shaded, the other half can still generate electricity

Darker appearance

• Monocrystalline cells for a uniform dark blue color and high efficiency

Reliable production

- Lower operating temperature for better reliability
- Reduced chance of defects due to lower operating temperature

Dimensions: 1683 x 997 x 38 mm

Weight: 18.9 kg

Efficiency: 20.3 %

Power Density: 203 W/m²

Max. System Voltage: 1000 V

Temperature Coefficient: -0.34 %/°C



REC TWINPEAK 35 MONO 72 SERIES*

72 CELL

Larger format helps reduce balance of system costs and the 30 mm frame makes this the lightest 72-cell panel on the market

405 WP POWER

More power through reduced resistance

- Halfcut cells for more power
- Better electron flow for stable power

Improved performance in shaded conditions

- REC's iconic Twin design generates more energy
- When one half is shaded, the other half can still generate electricity

Darker appearance

 Monocrystalline cells for a uniform dark blue color and high efficiency

Robust and durable

- REC's unique frame design makes the panel even more robust
- Extra protection against bending under load ensures a lifetime of high power generation

Reliable production

- Lower operating temperature for better reliability
- Reduced chance of defects due to lower operating temperature

Dimensions: $2008 \times 1001 \times 30 \text{ mm}$ Weight:22.3 kgEfficiency:20.1%Power Density: 201 W/m^2 Max. System Voltage:1000 V / 1500 VTemperature Coefficient:-0.34 W/°C

* Product not available in Germany.

REC REFERENCE INSTALLATIONS



SUPHANBURI, THAILAND REC PEAK ENERGY SERIES

72 MW 2014 110223 TONS

System CO₂ emissions year installed size saved annually



COBBITTY, NSW, AUSTRALIA REC TWINPEAK 2 MONO SERIES

10 kW

2019

16 TONS

System CO₂ emissions year installed saved annually

SCOTTSDALE. AZ. USA REC N-PEAK SERIES

21.8 kW 2019

System size

year installed

25 TONS CO₂ emissions

saved annually



SAN FRANCISCO. CA. USA REC TWINPEAK 25 72 SERIES

905 kW 2019

System size

installed

CO₂ emissions saved annually

927 TONS





BATTICALOA, SRI LANKA REC TWINPEAK 72 SERIES

1.6 MW

System

size

2017

year installed

1175 TONS CO₂ emissions

saved annually



RUDAWA. POLAND REC TWINPEAK BLACK SERIES

9.9 kW System

2016

12 TONS

size

year installed

CO₂ emissions saved annually

KAUA'I, HI, USA REC PEAK ENERGY SERIES

14.5 MW 2015

System size

year installed

12731 TONS CO₂ emissions saved annually



DEN BOSCH, NETHERLANDS REC PEAK ENERGY SERIES

921 kW 2013

System

year installed CO₂ emissions saved annually

656 TONS



18

REC CERTIFIED SOLAR PROFESSIONALS

The REC Certified Solar Professional Program was created with installers and end customers in mind, providing numerous advantages to both.

Not every installer can call themselves an 'REC Certified Solar Professional': members of the Program are carefully selected to undergo a unique installer certification program. Through this, we ensure solar installers are equipped with the know-how and best practices to install REC panels and can in turn, assure end customers that in addition to high-quality REC solar panels, they will receive a high-quality solar installation.



QUALITY PRODUCT, QUALITY INSTALLATION

Knowing that not only is the panel of high quality, but also that the person installing it is highly skilled and trained, gives end customers greater peace of mind for the quality of their installation.

ADDED COMFORT

Take comfort in knowing that your solar installer has been carefully selected, trained, and certified by REC. To be an 'REC Certified Solar Professional', the installer must be offering best-in-class service and reliability.

EXTENDED WARRANTY

By choosing an REC Certified Solar Professional for your installation, you can benefit from REC's unique REC ProTrust Warranty package at no extra cost. The REC ProTrust Warranty gives you an extra 5 years product warranty cover (25 years total) and up to 25 year labor cover* in addition to REC's 25-year performance warranty.



*Conditions apply. See www.recgroup.com for more details



GLOBAL PRESENCE

IISA

REC AMERICAS, LLC

Phone +1 877 332 4807

(North America regional hub)

NORWAY

REC SOLAR NORWAY AS

Fjordgata 48 3939 Porsgrunn

NORWAY

REC SOLAR NORWAY AS and REC SOLAR HOLDINGS AS

Norway Phone +47 380 17 000

GERMANY

REC SOLAR EMEA GMBH

80804 Munich Phone +49 89 4 42 38 59-0

(EMEA regional hub)

INDIA

RENEWABLE ENERGY CORPORATION (INDIA) PVT. LTD.

Office No. 1056, Regus Business Centre, Unitech Cyber Park, Tower B, Floor 10 Sector 39, Gurugram, Haryana, Phone: +91 124-6831771

Group headquarters

Production site

Regional hub/sales office

JAPAN

REC SOLAR JAPAN CO., LTD.

Shinjuku Sumitomo Building, 32F Phone +81 (0) 3 6302 0520

THAILAND

REC SYSTEMS (THAILAND) CO., LTD.

1 Q House Lumpini Tower Level 27 South Sathorn Road, Tungmahamek, Sathorn, Bangkok 10120

SINGAPORE

REC SOLAR PTE. LTD.

Singapore 637312 Singapore Phone +65 64 95 92 28

(Operational Headquarters)

SINGAPORE

REC SOLAR PTE. LTD.

Singapore 189721 Phone +65 64 95 97 86

AUSTRALIA

REC SOLAR

Phone: +61 3 9020 2056





Phone: +66 2 610 3776